



Stone All-in-One M770/M780


Stand to VESA Mount conversion Guide

V1.0 August 2013



Part 1: Take off the rear cover

- Step 1** → Put on a protection cushion on table
→ Lie down the system unit (Panel faces table)
and to let Stand lie on outside of table.

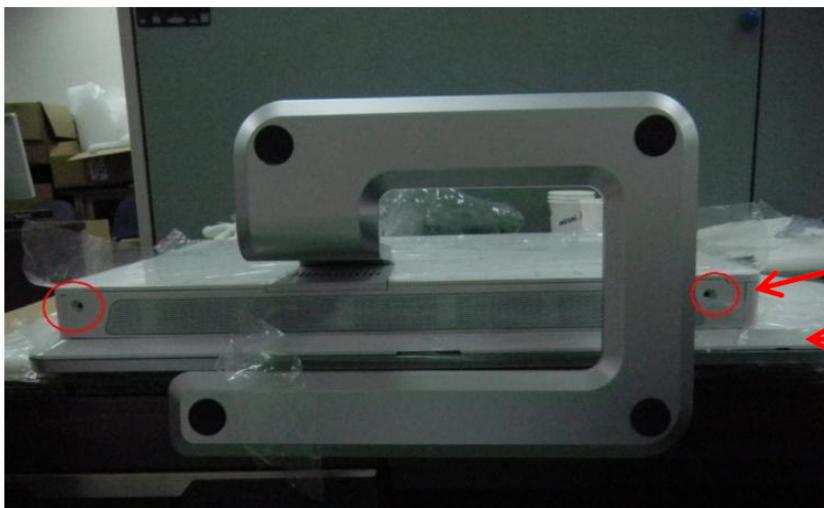

Screw location (2-place)

Protection cushion



Step 2 → Remove two screws



Step 3 → Rear Cover by sliding as direction as shown



Rear Cover




Step 4 → Take off the Rear Cover



Part 2: Disassemble the VESA Bracket

Step 1 → Remove 8 screws

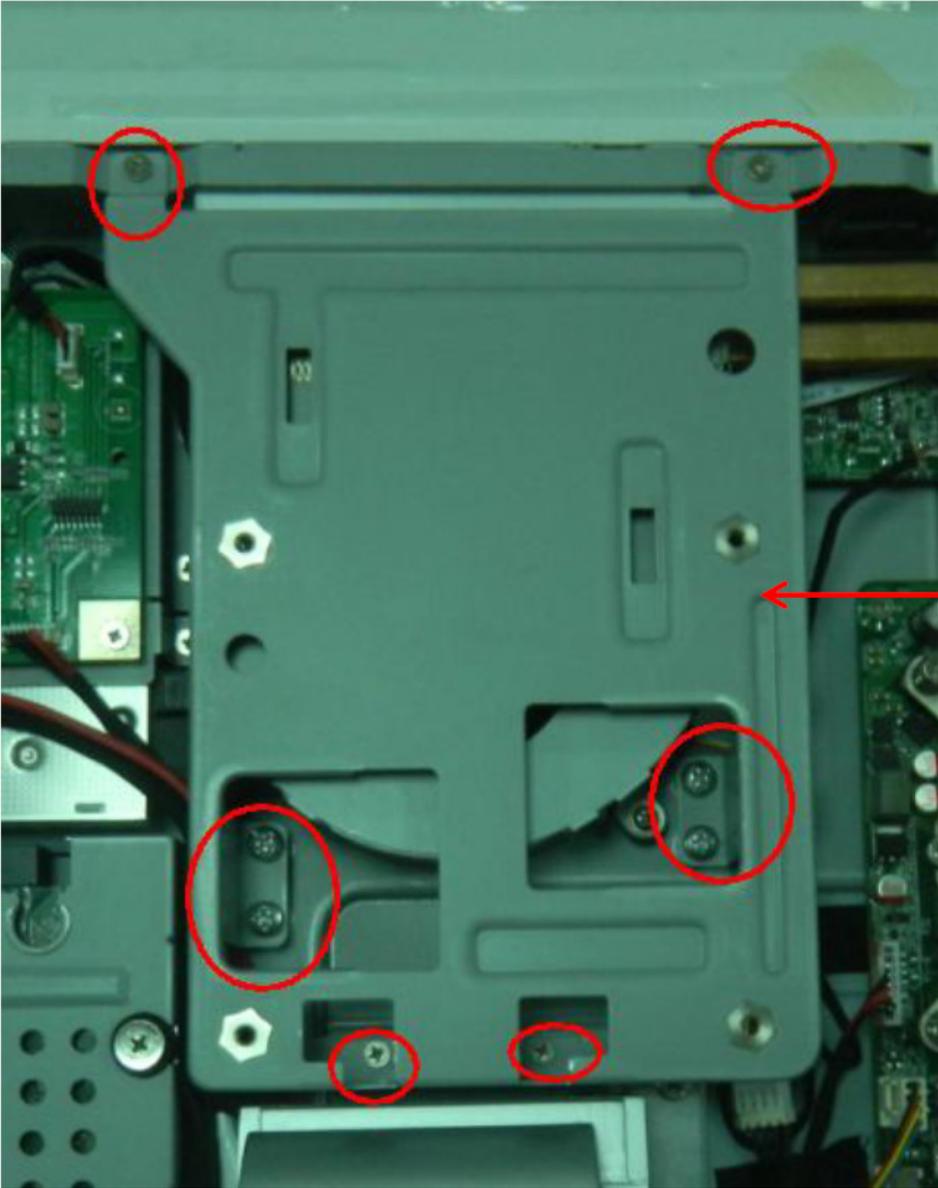

VESA bracket




Step 2 → Remove VESA bracket



Part 3: Take off rear small cover

Step 1 → Remove 2 screws

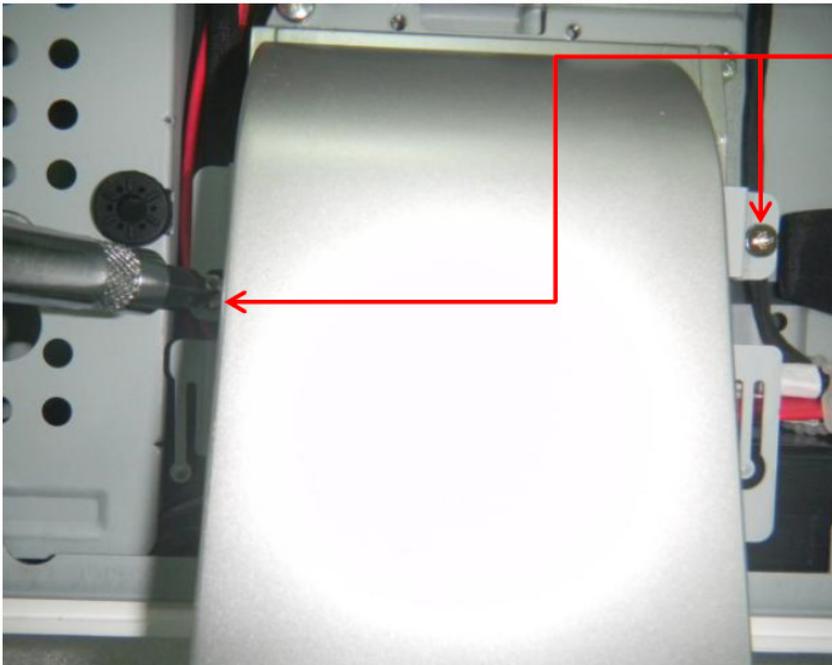


Screw locations (2-place)

Step 2 → Remove rear small cover




Part 4: Take off stand

Step 1 → Remove 3 screws

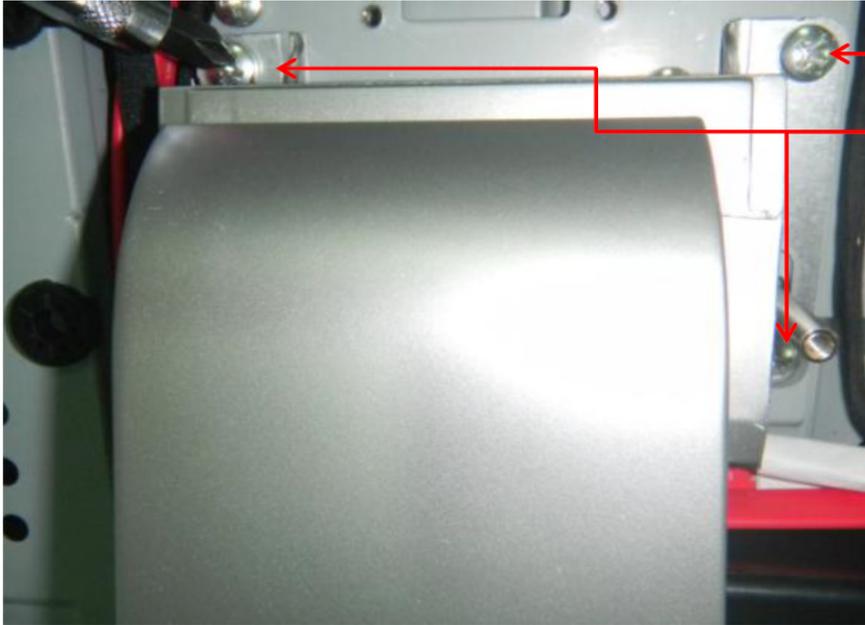

Screw locations (3-place)

Step 2 → Remove L-Stand as direction as shown.

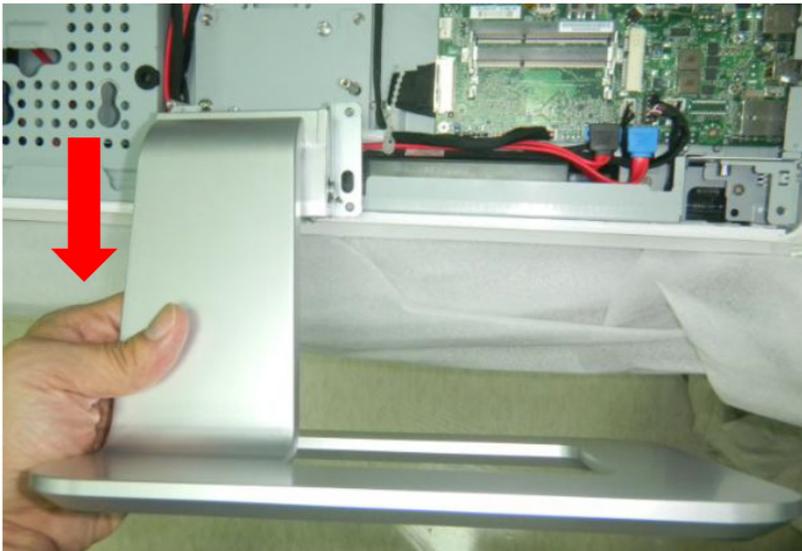


Part 5: Install VESA Bracket

Step 1 → Locate VESA bracket at rear.




Step 2 → Fix VESA bracket in place with 8 screws.

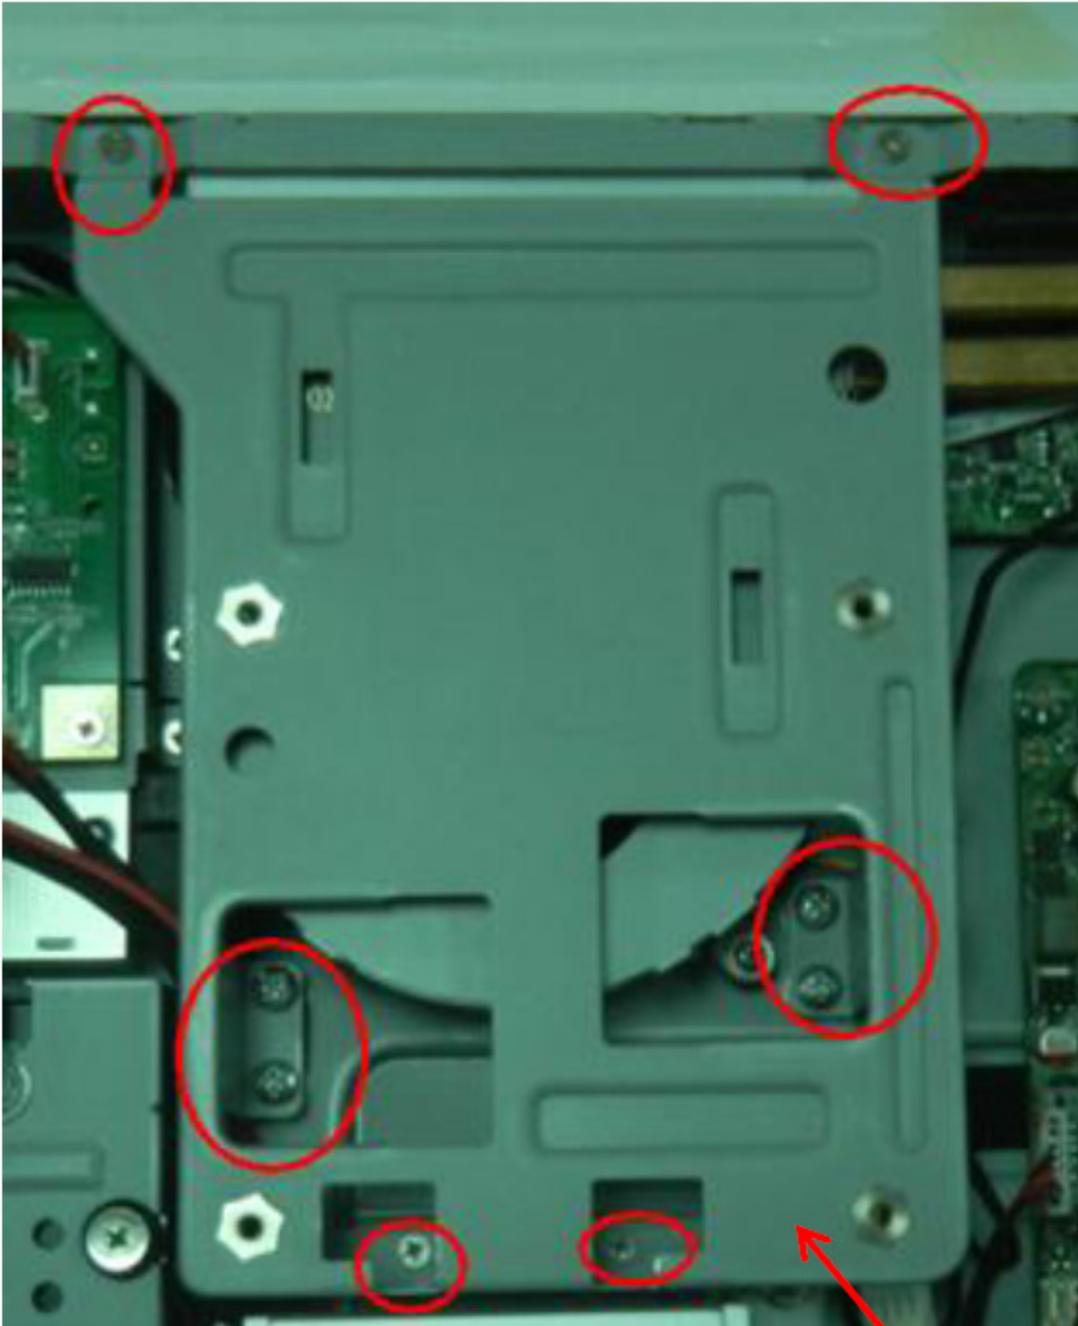

VESA bracket



Part 6: Install Rear Small Cover

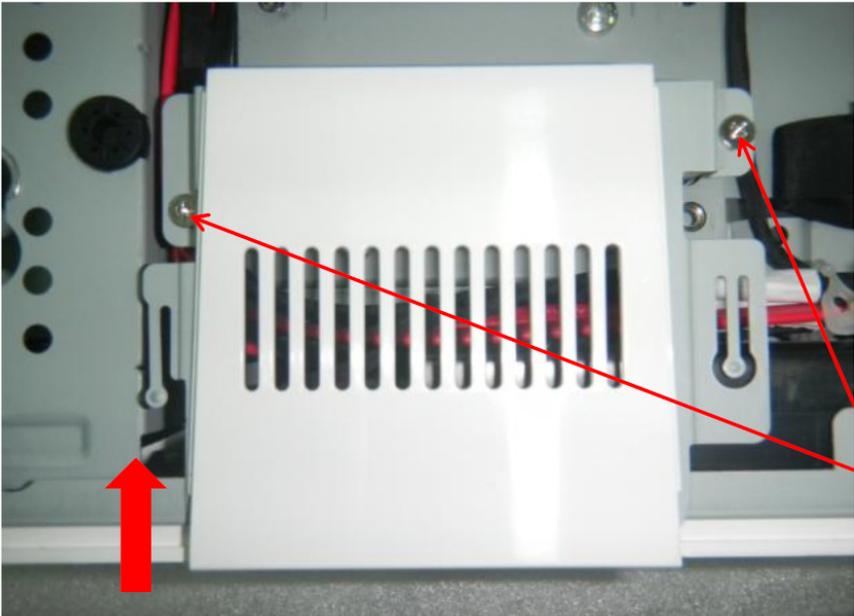


Screw locations (2-place)


To install Rear small cover as direction as shown and fix it by 2 screws.

Part 7: Install the No-Hinge Cover

Step 1 → To install the No hinge cover by 2 screws

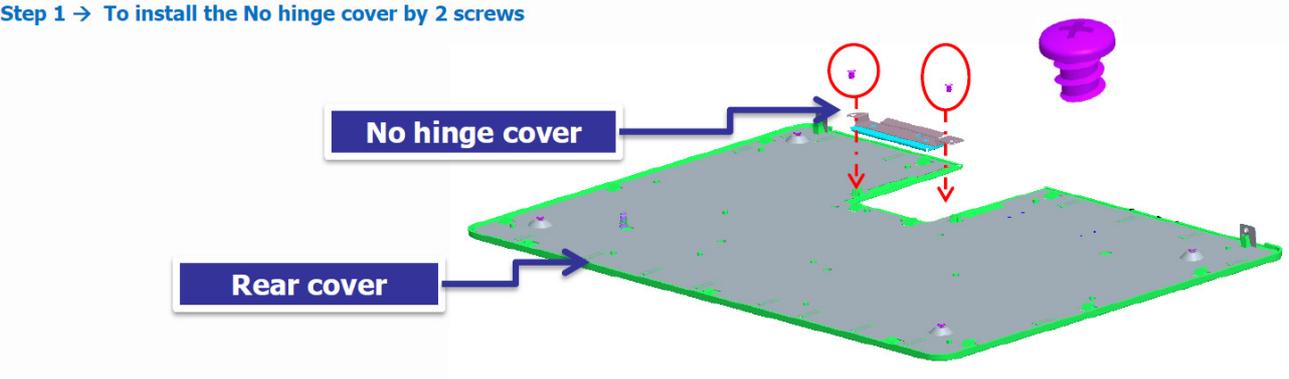


Step 2 → Fix the Nohinge cover on the Rear cover.

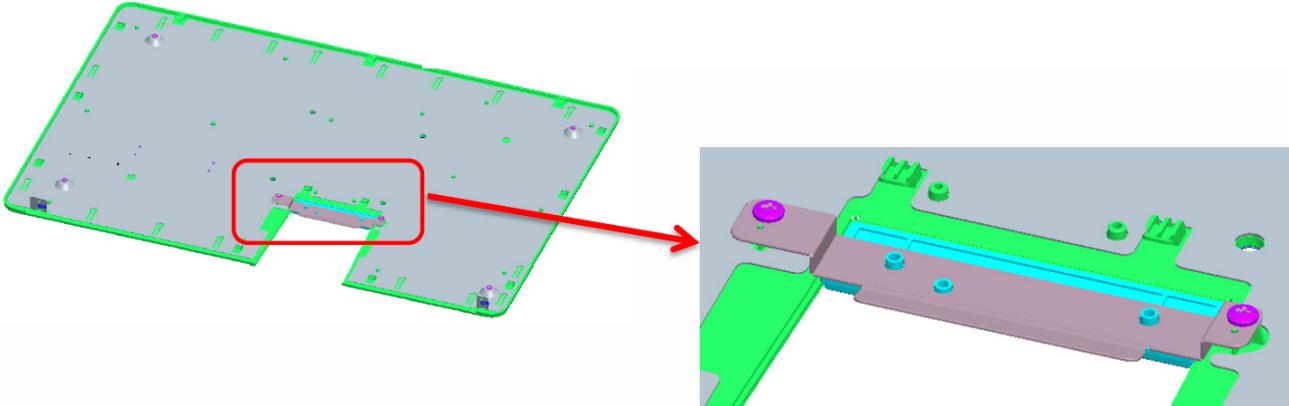


Part 8: Install the rear cover

Step 1 → To install the Rear cover as direction as shown.

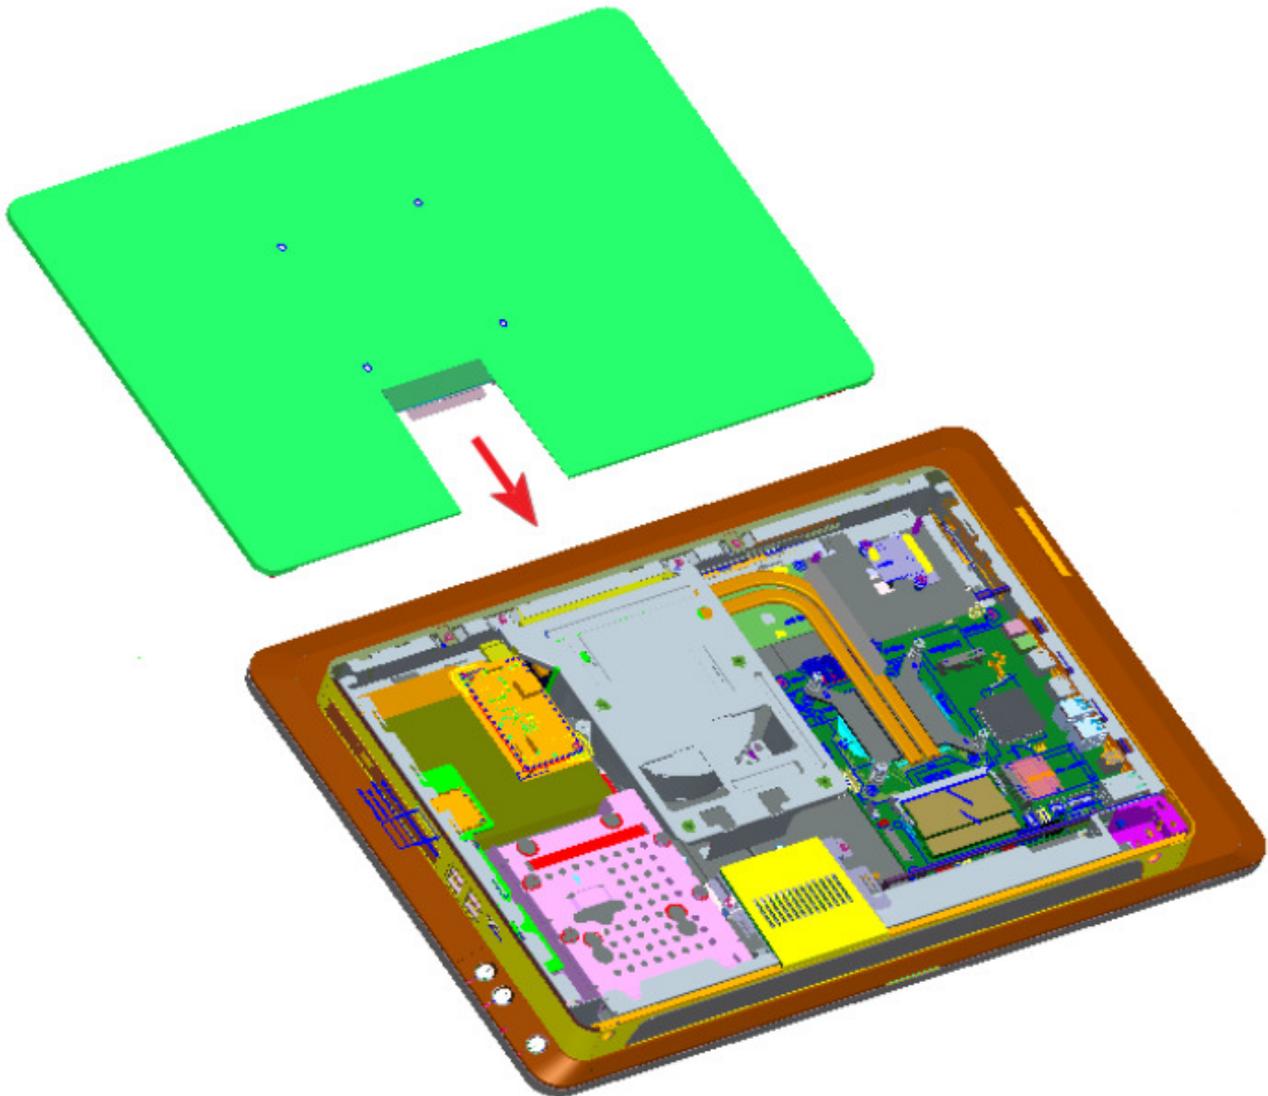

Step 2 → To fix the Rear cover by 2 screws.

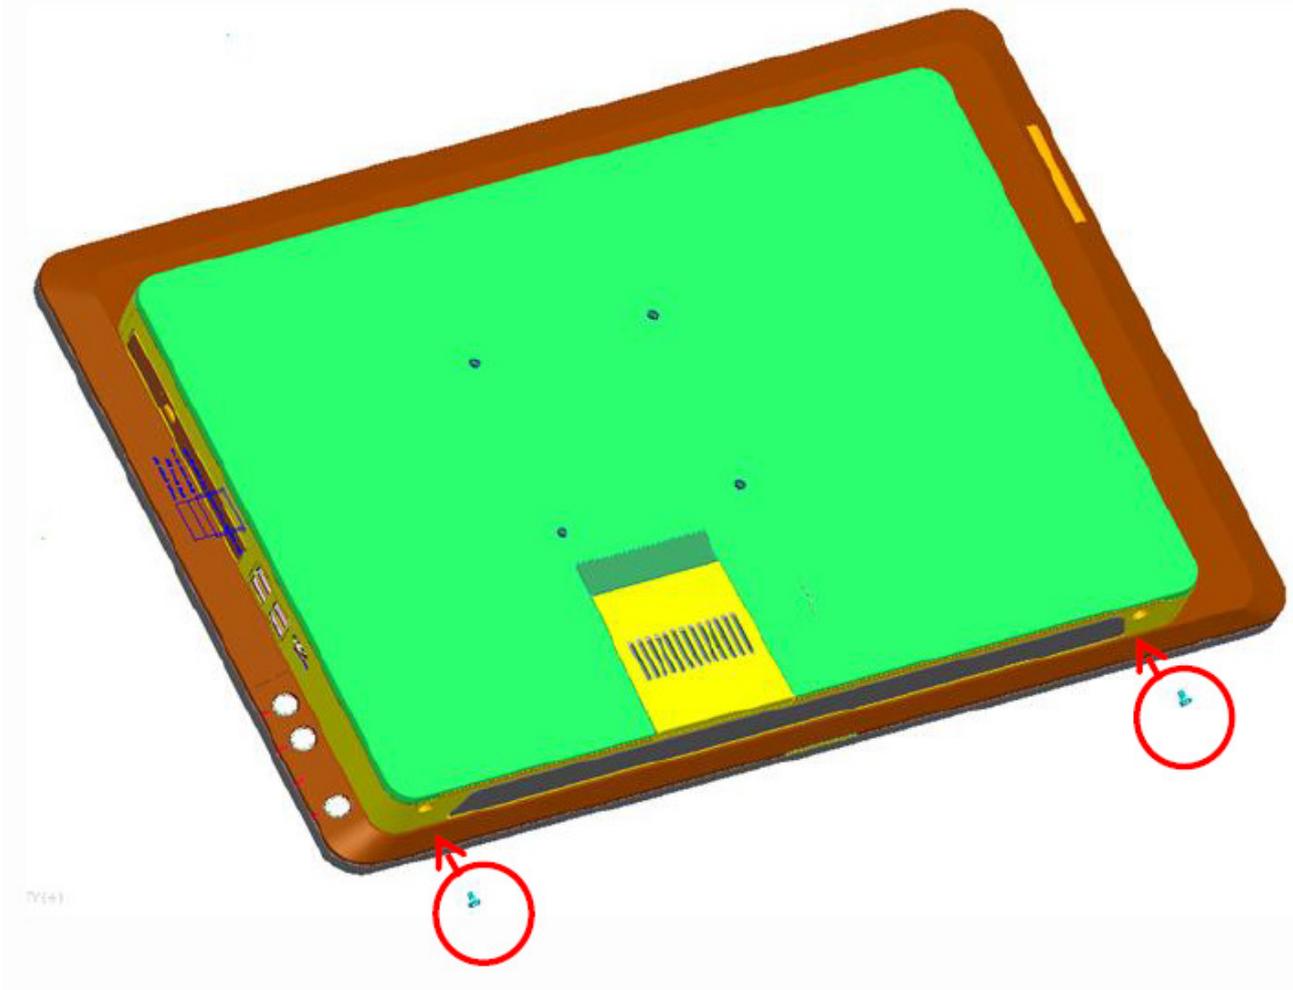

Completed View

