



## BOAMOT-499 - Stone / Asus H310M-R R2.0 - Motherboard Specification, Layout and Manual

### Motherboard Specification

- Intel H310 chipset.
- Socket LGA 1151v2 supporting 14nm Intel 8th Gen Coffee Lake processors.
- Two DDR4 DIMM slots - Supporting a maximum of 32GB @ 2400MHz/2666MHz (CPU dependant).
- Four SATA 6.0GB/s ports (gray).
- One PCIe 3.0 x16 slot (x16 mode).
- One PCIe 3.0 x1 slots.
- HDMI, VGA, DVI-D connectors supporting maximum resolutions up to 4096x2160 and up to 2 displays simultaneously.
- Realtek 8111H, 1x Gigabit LAN controller.
- Realtek ALC887 High Definition Audio.
- Two USB3.1 Gen 1 Type A rear ports.
- Two USB2.0 Type A rear ports.
- One USB3.1 Gen 1 internal connector.
- Micro ATX form factor.

### Product Layout

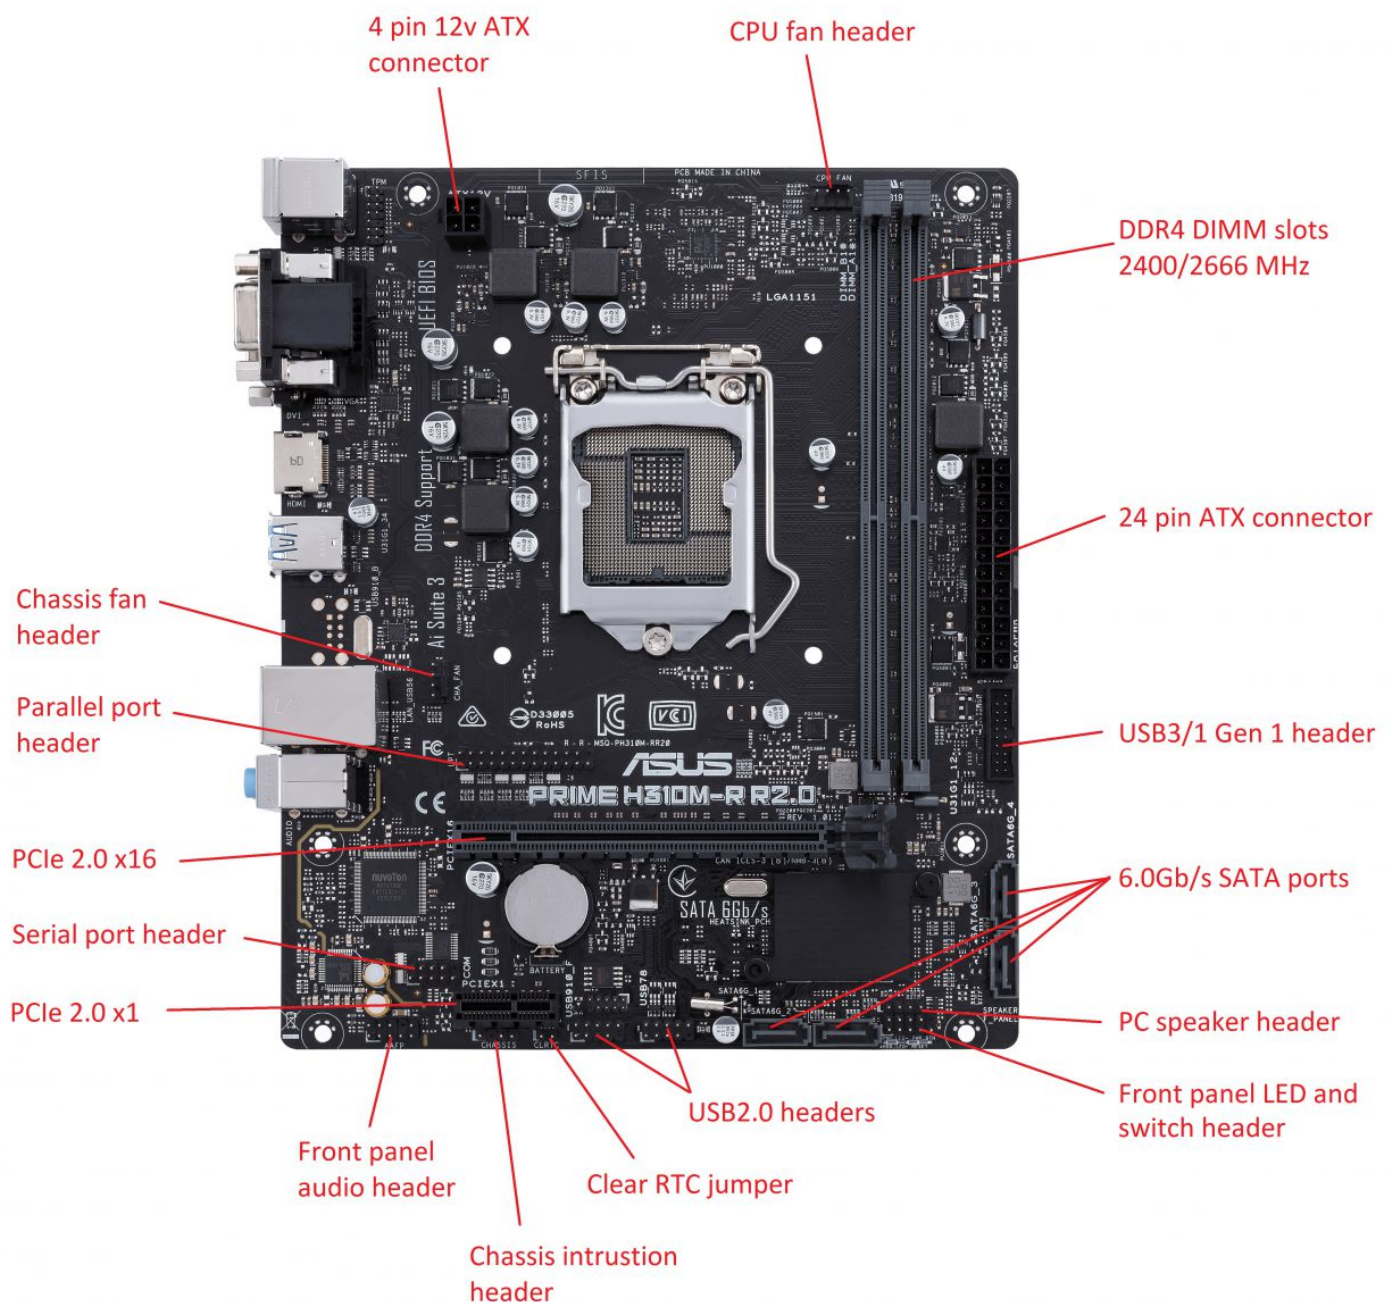

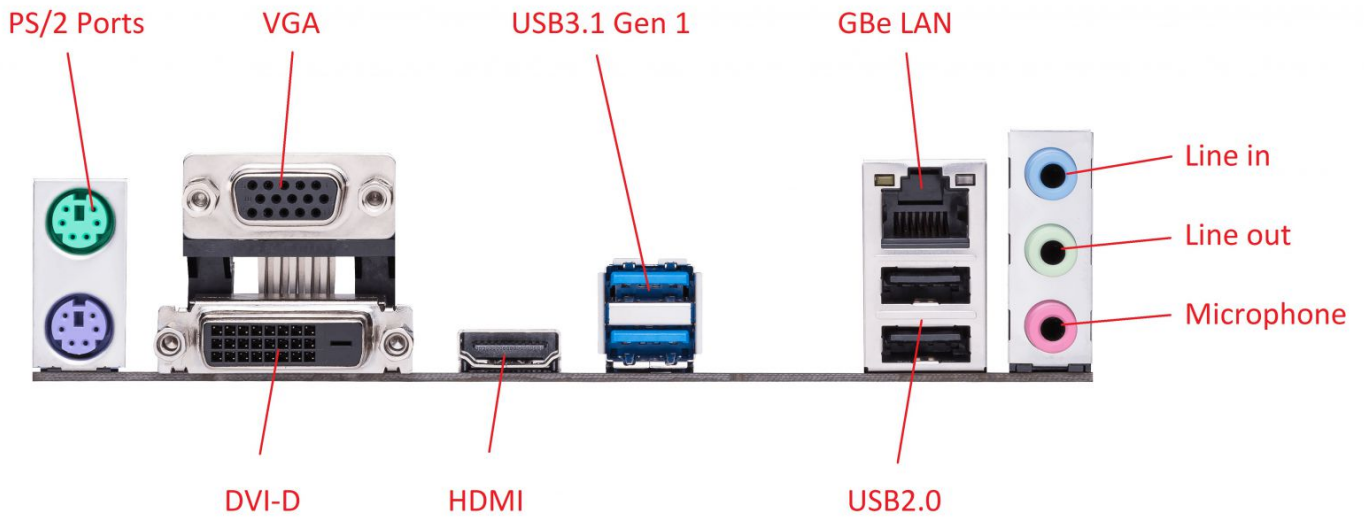

## Product Manual

Please find the manual for this motherboard attached to this article.

**Note:** This product only provides driver support for Windows 10.

Applies to:

- BOAMOT-499 - Stone / Asus H310M-R R2.0

---

Article ID: 723

Last updated: 13 Feb, 2019

Updated by: Paul Watkins

Revision: 1

Stone Branded Products -> Desktop PCs and All-in-One (AIO) -> BOAMOT-499 - Stone / Asus H310M-R R2.0 - Motherboard Specification, Layout and Manual

<https://kb.stonegroup.co.uk/index.php?view=entry&EntryID=723>